


Cone Pendant

COB LED EDITION BEAM TYPE

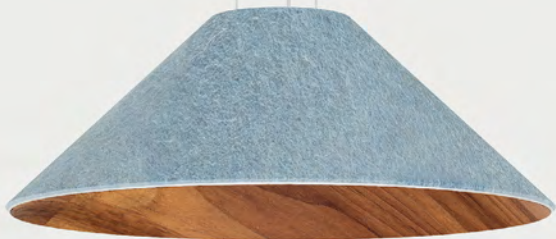

SERIES	Cone
MODEL	Pendant
EDITION	COB LED
TYPE	Beam
LUMEN OUTPUT + CONSUMPTION	LO: 700 lm 5.4 W 108 lm/W ST: 900 lm 7.2 W 108 lm/W HI: 1200 lm 9.9 W 108 lm/W
OPTICS	Super Spot 15° Spot 18° Medium 24° Wide 36° Extra Wide 60°
POWER INPUT	110-277V AC 50/60 Hz
WEIGHT	<3 lbs per foot <5 kg per metre
SUSPENSION	Adjustable up to specified length Standard: 5 ft 152 cm
MANUFACTURED IN	Toronto, ON, Canada
WARRANTY	10 year life cycle support 5 year warranty on parts Reclamation program available
CERTIFICATIONS	     

aaline's Cone Pendant features two layers of zero-plastic acoustic felt or an inside veneer finish for an elegant look with sound-absorption. Available in 40 accent colours, the Cone Pendant can be mixed and matched to complement any space.

Designed for optimal anti-glare performance, its angle and size ensure a comfortable, well-balanced glow. The Cone Pendant's COB LED edition allows fine-tuning of colour temperature with various dimming options available.

OPEN ONLINE PRODUCT CONFIGURATOR



PROJECT

LIGHT TYPE

QUANTITY

Product design at aaline is continuously refined to uphold the highest quality standards. We reserve the right to change specifications, contact us for the latest information. Final specifications and material selections will be confirmed at the shop drawing stage.

Cone Pendant

05. FELT ORIENTATION




FOI
Felt Outside + Inside





FOV +
Felt Outside + Veneer Inside


06. SIZE




S
14-7/16" Ø




L
17-3/8" Ø



07. DRIVER




R
Remote
Driver is in a remote location




C
Powered Canopy
Driver is in a canopy connected to the junction box


10. OPTICS




SS
Super Spot
15°




SP
Spot
18°



MD
Medium
24°



WD
Wide
36°



XW
Extra Wide
60°


11. COLOUR TEMP




27
2700K
Warm White
90+ CRI




30
3000K
Soft White
90+ CRI



35
3500K
Natural White
90+ CRI



40
4000K
Cool White
90+ CRI



DW +
3000K - 1800K
Dim-To-Warm

Cone Pendant

12/13. WOOD INSERT/FINISH: CLEAR



WAL-CFDO +
Danish Oil
<5 GU @ 60°



WAL-CFEC
ECO Coat | Zero VOC
<7 @ 60°



OAK-CFDO +
Danish Oil
<5 GU @ 60°




OAK-CFEC
ECO Coat | Zero VOC
<7 @ 60°



MPL-CFDO +
Danish Oil
<5 GU @ 60°




MPL-CFEC
ECO Coat | Zero VOC
<7 GU @ 60°



CONTACT US
FOR SAMPLE

EGW-CFDO +
Danish Oil
<5 GU @ 60°




CONTACT US
FOR SAMPLE

EGW-CFEC
ECO Coat | Zero VOC
<7 GU @ 60°

13. WOOD INSERT FINISH: PAINTED



Painted finish for EGW wood types only



EGW-PFBK
Satin Black
20-35 GU @ 60°



EGW-PFWH
Satin White
20-35 GU @ 60°




EGW-PFXX +
Custom Paint
20-35 GU @ 60°


14/15. FELT OUTSIDE/INSIDE




Click here for the entire
felt collection



F384
Charcoal



F382
Pebble Grey



F311
Wool White



F251
Meadow Green



F152
Olive



FXXX +
Custom

15. VENEER INSIDE



VWAL +
Walnut




VOAK +
White Oak



VMPL +
Hard Maple


Cone Pendant

16. CANOPY DIMENSIONS



Remote Canopy

Driver is in a remote location



Powered Canopy

Driver is in a canopy connected to the junction box

17. CABLE COLOUR



C

Clear Jack with Silver Core

Remote Systems

Low-voltage

19. MOUNTING



PO

Power Over Cable

Low voltage power over cable hardware



JB

Junction Box

Hanging cable at the centre of the junction box

AALINE RECLAMATION PROGRAM



Click here for more on Product Life Cycle



Right to Repair

aaline is committed to providing services and support at all stages of the design process, including reclamation and disposal. Please contact us and we will arrange to get the system to our factory so we can refurbish it for you or re-use parts and components that can be reclaimed. Our lighting and acoustic fixtures are made with 100% biodegradable or recyclable materials. The electrical components are RoHS certified and contain no hazardous elements and should be recycled at a specialized recycling facility.

CN - PN - COB - BM - - - - - - - - - - - - - - - -C -																		
01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17/18	19	
PARAMETER		CODE		DESCRIPTION		CONDITIONALS		NOTES										
01. SERIES		CN		Cone														
02. MODEL		PN		Pendant														
03. EDITION		COB		COB LED														
04. TYPE		BM		Beam														
05. FELT ORIENTATION		FOI		Felt Outside + Inside														
		FOV +		Felt Outside + Veneer Inside														
06. SIZE		S		14-7/16" Ø														
		L		17-3/8" Ø														
07. DRIVER		R		Remote														
		C		Canopy														
08. DIMMING		010 •		0-10V														
		020		TRIAC/ELV														
		DAL +		DALI		For R driver only												
		LUT +		LUTRON Athena Wireless Node		For R driver only		Reduced warranty, contact us for more info										
09. LUMEN OUTPUT		LO		700 lm 5.4 W 108 lm/W														
		ST •		900 lm 7.2 W 108 lm/W														
		HI +		1200 lm 9.9 W 108 lm/W														
								LED source output. Based on 3500K, 90 CRI with XW beam angle. Actual output may vary +/- 5%.										
10. OPTICS		SS		Super Spot 15°														
		SP		Spot 18°														
		MD		Medium 24°														
		WD		Wide 36°														
		XW		Extra Wide 60°														
11. COLOUR TEMP		27K		2700K Warm White 90+ CRI														
		30K		3000K Soft White 90+ CRI														
		35K		3500K Natural White 90+ CRI														
		40K		4000K Cool White 90+ CRI														
		DW +		Dim-To-Warm 3000K - 1800K														
12. WOOD INSERT		EGW		Engineered Wood														
		WAL +		Walnut														
		OAK +		White Oak														
		MPL +		Maple														
13. WOOD INSERT FINISH: CLEAR		CFDO +		Danish Oil														
		CFEC		ECO Coat Zero VOC														
WOOD INSERT FINISH: PAINTED		PFBK		Painted Finish Satin Black		For EGW wood type only												
		PFWH		Painted Finish Satin White														
		PFXX +		Painted Finish Custom														
14. FELT OUTSIDE		FO384		Charcoal														
		FO382		Pebble Grey														
		FO311		Wool White														
		FO251		Meadow Green														
		FO152		Olive														
		FO000		Custom														

CN - PN - COB - BM -

0102030405060708091011121314151617/1819

-C-

PARAMETER	CODE	DESCRIPTION	CONDITIONALS	NOTES
15. FELT INSIDE	F1384 F1382 F1311 F1251 F1152 F1000	Charcoal Pebble Grey Wool White Meadow Green Olive Custom	Felt Inside available on FOI felt orientation only	
VENEER INSIDE	VWAL + VOAK + VMPL +	Walnut White Oak Maple	Veneer Inside available on FOV felt orientation only	
16. CANOPY COLOUR	WH • BK XX +	White Black Custom		
17. CABLE COLOUR	C	Clear Jacket with Silver Core		
18. CABLE LENGTH		In Feet 5' standard • 6' and above +		On-site adjustable
19. MOUNTING ADD-ON	PO JB	Power Over Cable Junction Box Support	For R driver only For C driver only	

CUSTOM NOTES