

5 Conductor Cable

White	N
Black	L
Green	PG
Purple	Dim +
Grey	Dim -
0-10V Dimming	

Wire Driver 5 Conductor Cable to Junction Box (See Junction Box Installation Guide for Further Detail)

Aircraft Cable Hardware to be Fastened to a Structural Support

Fasten Cable Gripper to Aluminum Channel with Supplied #10-32 Screws

Adjustability Points for Height

Aluminum Channel

LED Driver Box

Fasten Both Stand-off Crossbars to Aluminum Channel with Two #8-32 Screws Per Side


Step 3 Guide Notes:

- Look for Blue Circle Labels on Aluminum Channel for Position Reference
- Make Sure Cable Notch is Facing the Ends of the Aluminum Channel

Fasten Driver Box to Center of Aluminum Channel with Two #8-32 Screws Per Side

Step 4 Guide Notes:

- Look for Red Circle Labels on Aluminum Channel for Position Reference

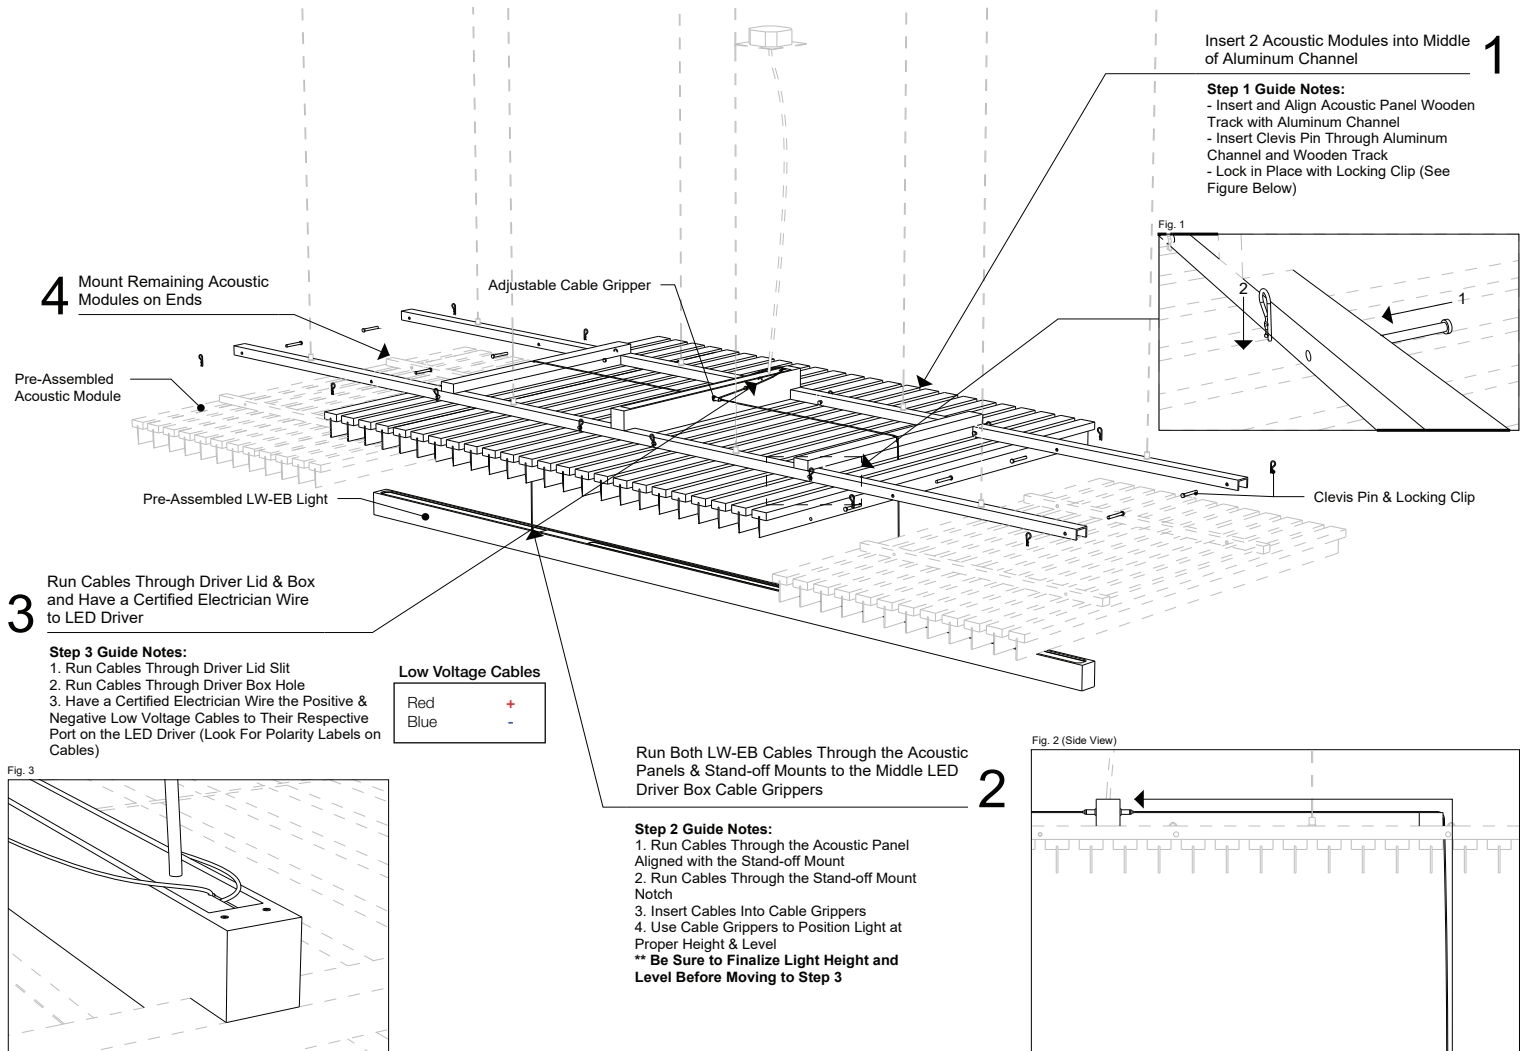

****NOTE:** To be installed by a certified electrician based on the codes of the region of installation. Fishtnk Inc. recommends two separate junction boxes for low voltage and high voltage wires. To comply with electrical code. A licensed electrician can install as appropriate.