







Cone Pendant

COB LED EDITION GLOBE TYPE

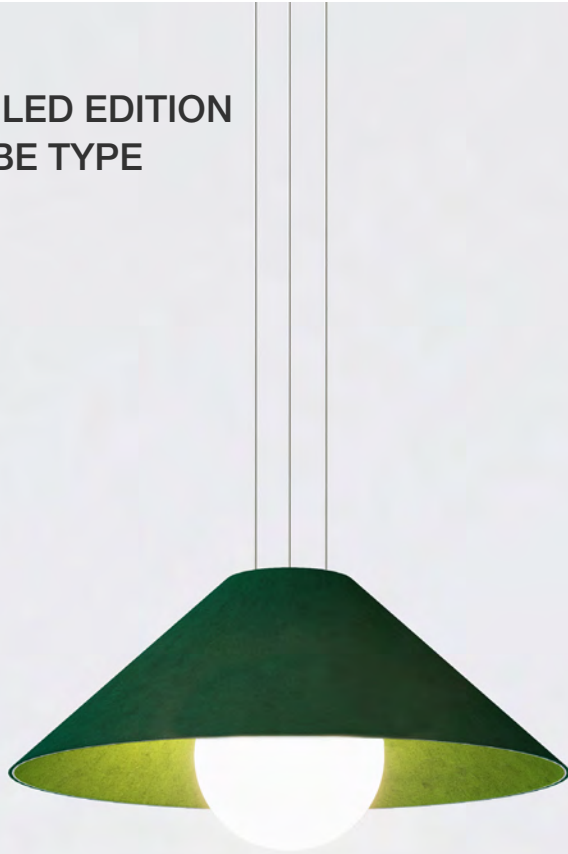

SERIES	Cone
MODEL	Pendant
EDITION	COB LED
TYPE	Globe Frosted Opal Glass
LUMEN OUTPUT + CONSUMPTION	LO: 420 lm 5.4 W 72.7 lm/W ST: 540 lm 7.2 W 72.7 lm/W HI: 720 lm 9.9 W 72.7 lm/W
OPTICS	Omni-Directional 340°
POWER INPUT	110-277V AC 50/60 Hz
WEIGHT	<3 lbs per foot <5 kg per metre
SUSPENSION	Adjustable up to specified length Standard: 5 ft 152 cm
MANUFACTURED IN	Toronto, ON, Canada
WARRANTY	10 year life cycle support 5 year warranty on parts Reclamation program available
CERTIFICATIONS	    

aaline's Cone Pendant features two layers of zero-plastic acoustic felt or an inside veneer finish for an elegant look with sound-absorption. Available in 40 accent colours, the Cone Pendant can be mixed and matched to complement any space.

Designed for optimal anti-glare performance, its angle and size ensure a comfortable, well-balanced glow. The Cone Pendant's COB LED edition allows fine-tuning of colour temperature with various dimming options available.

[OPEN ONLINE PRODUCT CONFIGURATOR](#)



PROJECT

LIGHT TYPE

QUANTITY

Product design at aaline is continuously refined to uphold the highest quality standards. We reserve the right to change specifications, contact us for the latest information. Final specifications and material selections will be confirmed at the shop drawing stage.

Cone Pendant

05. FELT ORIENTATION




FOI
Felt Outside + Inside




FOV +
Felt Outside + Veneer Inside

06. SIZE

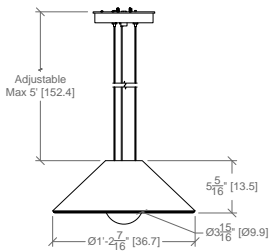


S
14-7/16" Ø
4" Frosted Globe




L
17-3/8" Ø
6" Frosted Globe

07. DRIVER




R
Remote
Driver is in a remote location



C
Powered Canopy
Driver is in a canopy connected to the junction box

10. OPTICS



OM
Omni-Directional
340°
Distribution limited to ~137° based on fixture design.


11. COLOUR TEMP




27
2700K
Warm White
90+ CRI



30
3000K
Soft White
90+ CRI



35
3500K
Natural White
90+ CRI



40
4000K
Cool White
90+ CRI

Cone Pendant

12/13. WOOD INSERT/FINISH: CLEAR



WAL-CFDO +
Danish Oil
<5 GU @ 60°



WAL-CFEC
ECO Coat | Zero VOC
<7 @ 60°



OAK-CFDO +
Danish Oil
<5 GU @ 60°




OAK-CFEC
ECO Coat | Zero VOC
<7 @ 60°




MPL-CFDO +
Danish Oil
<5 GU @ 60°



MPL-CFEC
ECO Coat | Zero VOC
<7 GU @ 60°



CONTACT US
FOR SAMPLE



CONTACT US
FOR SAMPLE


EGW-CFDO +
Danish Oil
<5 GU @ 60°

EGW-CFEC
ECO Coat | Zero VOC
<7 GU @ 60°

13. WOOD INSERT FINISH: PAINTED



Painted finish for EGW wood types only



EGW-PFBK
Satin Black
20-35 GU @ 60°



EGW-PFWH
Satin White
20-35 GU @ 60°




EGW-PFXX +
Custom Paint
20-35 GU @ 60°


14/15. FELT OUTSIDE/INSIDE




Click here for the entire felt collection



F384
Charcoal



F382
Pebble Grey



F311
Wool White



F251
Meadow Green



F152
Olive



FXXX +
Custom

15. VENEER INSIDE



VWAL +
Walnut




VOAQ +
White Oak




VMPL +
Hard Maple

Cone Pendant

16. CANOPY DIMENSIONS



Remote Canopy
Driver is in a remote location



Powered Canopy
Driver is in a canopy connected to the junction box

17. CABLE COLOUR



C
Clear Jack with Silver Core
Remote Systems
Low-voltage

19. MOUNTING



PO
Power Over Cable
Low voltage power over cable hardware



JB
Junction Box
Hanging cable at the centre of the junction box

AALINE RECLAMATION PROGRAM



Click here for more on Product Life Cycle



Right to Repair

aaline is committed to providing services and support at all stages of the design process, including reclamation and disposal. Please contact us and we will arrange to get the system to our factory so we can refurbish it for you or re-use parts and components that can be reclaimed. Our lighting and acoustic fixtures are made with 100% biodegradable or recyclable materials. The electrical components are RoHS certified and contain no hazardous elements and should be recycled at a specialized recycling facility.

Cone Pendant

COB LED EDITION | GLOBE TYPE | PRODUCT SPECIFICATION

• PRODUCT STANDARD | + PRODUCT UPGRADE

CN - PN - COB - GL -

01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17/18 19

PARAMETER	CODE	DESCRIPTION	CONDITIONALS	NOTES
01. SERIES	CN	Cone		
02. MODEL	PN	Pendant		
03. EDITION	COB	COB LED		
04. TYPE	GL	Globe Frosted Opal Glass		
05. FELT ORIENTATION	FOI	Felt Outside + Inside		
	FOV +	Felt Outside + Veneer Inside		
06. SIZE	S	14-7/16" Ø 4" Frosted Globe		
	L	17-3/8" Ø 6" Frosted Globe		
07. DRIVER	R	Remote		
	C	Canopy		
08. DIMMING	010 •	0-10V		Reduced warranty, contact us for more info
	020	TRIAC/ELV		
	DAL +	DALI	For R driver only	
	LUT +	LUTRON Athena Wireless Node	For R driver only	
09. LUMEN OUTPUT	LO	420 lm 5.4 W 72.7 lm/W		LED source output. Based on 3500K. Actual output will vary +/- 5%.
	ST •	540 lm 7.2 W 72.7 lm/W		
	HI +	720 lm 9.9 W 72.7 lm/W		
10. OPTICS	OM	Omni Directional 340°		Distribution limited to ~137° based on fixture design.
11. COLOUR TEMP	27K	2700K Warm White 90+ CRI		
	30K	3000K Soft White 90+ CRI		
	35K	3500K Natural White 90+ CRI		
	40K	4000K Cool White 90+ CRI		
	DW +	Dim-To-Warm 3000K - 1800K		
12. WOOD INSERT	EGW	Engineered Wood		
	MPL +	Maple		
	OAK +	White Oak		
	WAL +	Walnut		
13. WOOD INSERT FINISH: CLEAR	CFDO +	Danish Oil		
	CFEC	ECO Coat Zero VOC		
WOOD INSERT FINISH: PAINTED	PFBK	Painted Finish Satin Black	For EGW wood type only	
	PFWH	Painted Finish Satin White		
	PFX +	Painted Finish Custom		
14. FELT OUTSIDE	F0384	Charcoal		
	F0382	Pebble Grey		
	F0311	Wool White		
	F0251	Meadow Green		
	F0152	Olive		
	F0000	Custom		
15. FELT INSIDE	F1384	Charcoal	Felt Inside available on FOI felt orientation only	
	F1382	Pebble Grey		
	F1311	Wool White		
	F1251	Meadow Green		
	F1152	Olive		
	F1000	Custom		
VENEER INSIDE	VWAL +	Walnut	Veneer Inside available on FOV felt orientation only	
	VOAK +	White Oak		
	VMPL +	Maple		

