

Cylinder Pendant

WOOD EDITION



SERIES	Cylinder
MODEL	Pendant
EDITION	Wood
LUMEN OUTPUT + CONSUMPTION	Integrated: 1200 lm, 9.9 W Remote or Powered Canopy: 700 lm, 5.4 W 900 lm, 7.2 W 1200 lm, 9.9 W <i>Based on 80 CRI, 3000K. Actual output may vary +/- 5%</i>
POWER INPUT	110-277V AC 50/60 Hz
WEIGHT	< 3 lbs per foot < 4.5 kg per metre
OPTICS	PMMA lens, various beam angles
SUSPENSION	Adjustable up to specified length Standard: 5 ft 152 cm
MANUFACTURED IN	Toronto, ON, Canada
WARRANTY	10 year life cycle support 5 year warranty on parts Reclamation program available
CERTIFICATIONS	   

The Cylinder Pendant introduces a versatile fixture that seamlessly integrates into interior spaces. The compact pendant now features a wood housing with an integrated heatsink for increased life expectancy. Available in different sizes, finishes, and beam angle options, this product invites exploration of curated indoor lighting.

OPEN ONLINE PRODUCT CONFIGURATOR



PROJECT


LIGHT TYPE

QUANTITY


Product design at **aaline** is continuously refined to uphold the highest quality standards. We reserve the right to change specifications, contact us for the latest information. Final specifications and material selections will be confirmed at the shop drawing stage.

Cylinder Pendant | Wood


04. HEIGHT

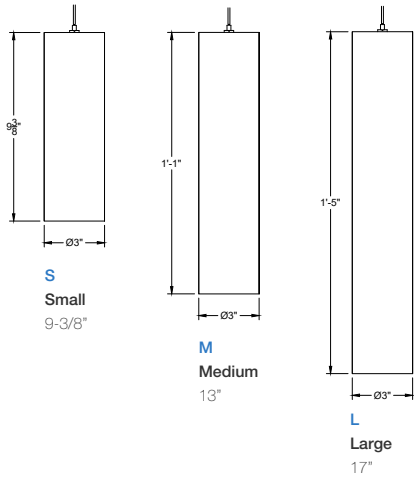


05. DRIVER

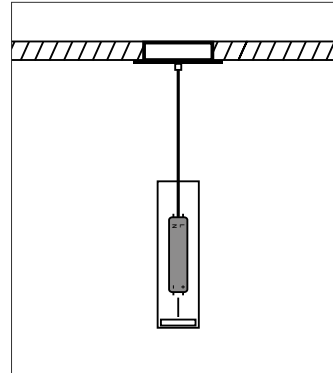

I
Integrated
Driver is within the fixture

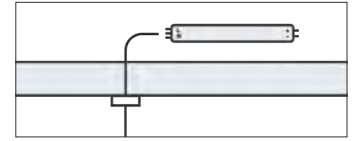


R
Remote
Driver is in a remote location

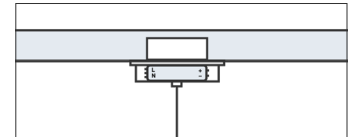

C
Powered Canopy
Low voltage cable down to fixture from remote driver canopy mounted to junction box

08. OPTICS

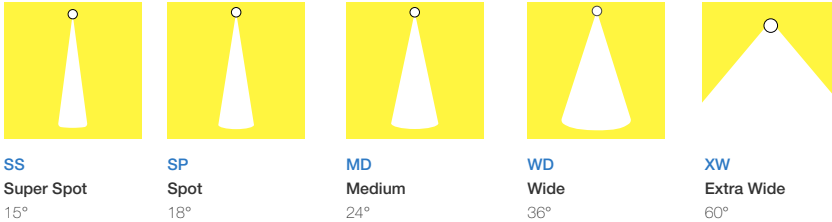

09. COLOUR TEMP



Cylinder Pendant | Wood

10/11. WOOD SELECTION/WOOD FINISH: CLEAR



WAL-CFST
Clear Finish Satin
10 GU @ 60°



WAL-CFDO +
Danish Oil
<5 GU @ 60°



WAL-CFEC
ECO Coat | Zero VOC
<7 @ 60°



OAK-CFST
Clear Finish Satin
10 GU @ 60°



OAK-CFDO +
Danish Oil
<5 GU @ 60°



OAK-CFEC
ECO Coat | Zero VOC
<7 @ 60°



CHR-CFST
Clear Finish Satin
10 GU @ 60°



CHR-CFDO +
Danish Oil
<5 GU @ 60°



CHR-CFEC
ECO Coat | Zero VOC
<7 @ 60°



MPL-CFST
Clear Finish Satin
10 GU @ 60°



MPL-CFDO +
Danish Oil
<5 GU @ 60°



MPL-CFEC
ECO Coat | Zero VOC
<7 GU @ 60°



ASH-CFST
Clear Finish Satin
10 GU @ 60°



ASH-CFDO +
Danish Oil
<5 GU @ 60°




ASH-CFEC
ECO Coat | Zero VOC
<7 GU @ 60°

11. PAINTED FINISH



Painted finish for ASH wood type only



ASH-PFBK
Satin Black
20-35 GU @ 60°




ASH-PFWH
Satin White
20-35 GU @ 60°




ASH-PFXX +
Custom Paint
20-35 GU @ 60°


12. CANOPY DIMENSIONS

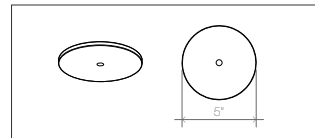

Integrated Canopy
Driver is inside the light fixture



Remote Canopy
Driver is in a remote location

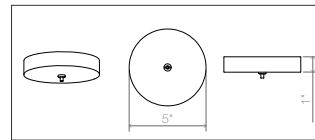

Powered Canopy
Driver is inside canopy in the same room as the light fixture


13. CABLE COLOUR



W •
White
Integrated Systems
High-voltage



B
Black
Integrated Systems
High-voltage



C
Clear Jack with Silver Core
Remote or Powered Canopy Systems
Low-voltage

15. MOUNTING



JB - Integrated
Junction Box Support
Hanging cable at the centre of the junction box



JB - Powered Canopy
Junction Box Support
Hanging cable at the centre of the junction box



PO - Remote
Power Over Cable
Low voltage power over cable hardware

Cylinder Pendant | Wood

PRODUCT SPECIFICATION

• PRODUCT STANDARD | + PRODUCT UPGRADE

CY-PN-WOOD-

01 02 03 04 05 06 07 08 09 10 11 12 13 14 15

PARAMETER	CODE	DESCRIPTION	CONDITIONALS	NOTES
01. SERIES	CY	Cylinder		
02. MODEL	PN	Pendant		
03. EDITION	WOOD	Wood		
04. HEIGHT	S M L	Small 9-3/8" Medium 13" Large 17"		
05. DRIVER	I R C	Integrated Remote Powered Canopy		
06. DIMMING	010 • 020 DAL + LUT +	0-10V TRIAC/ELV DALI LUTRON EcoSystem	For R driver only For R driver only	Reduced warranty, contact us for more info.
07. POWER	5W 7W 10W	700 lm 5.4 W 125 lm/W 900 lm 7.2 W 125 lm/W 1200 lm 9.9 W 125 lm/W	For R and C driver only For R and C driver only	Based on 3000K, actual output may vary +/- 5%
08. OPTICS	SS SP MD WD XW	Super Spot 15° Spot 18° Medium 24° Wide 36° Extra Wide 60°		
09. COLOUR TEMP	27K 30K 35K 40K DW	2700K Warm White 90+ CRI 3000K Soft White 90+ CRI 3500K Natural White 90+ CRI 4000K Cool White 90+ CRI Dim-To-Warm 3000K - 1800K	For 010 dimming only	
10. WOOD	WAL OAK CHR MPL ASH	Walnut White Oak Cherry Hard Maple White Ash		
11. WOOD FINISH: CLEAR	CFST • CFDO + CFEC	Clear Finish Satin Danish Oil ECO Coat Zero VOC		
WOOD FINISH: PAINTED	PFBK PFWH PFXX +	Painted Finish Satin Black Painted Finish Satin White Painted Finish Custom	Painted Finish for ASH wood only	
12. CANOPY COLOUR	WH • BK XX +	White Black Custom		
13. CABLE COLOUR	W B C	White Black Clear Jacket with Silver Core	For I driver only For R and C driver only For R and C driver only	
14. CABLE LENGTH		In Feet 5' standard • 6' and above +		On-site adjustable
15. MOUNTING	JB PO	Junction Box Power Over Cable	For I and C drivers only For R driver only	