

Installation Guide

CN-PN-COB | Powered Canopy | Cone Pendant COB LED

Applicable to Models: CN-PN-COB-BM, CN-PN-COB-GL


****Note:** To be installed by a certified electrician based on the codes of the region of installation. Fishtnk Inc. recommends two separate junction boxes for low voltage and high voltage wires. To comply with electrical code. A licensed electrician can install as appropriate

****Remarque:** À être installé par un électricien certifié, conformément aux codes régionaux d'installation électriques. Fishtnk recommande deux boîtes séparées pour les câbles à basse tension et à haute tension

Pre-Install


- Remove the cap nut to reveal the driver inside the canopy
- Hold up the canopy plate to the Junction Box and have a certified electrician wire high-voltage power cable from the Junction Box to the corresponding cable connector within the canopy

Refer to the charts below for wiring information

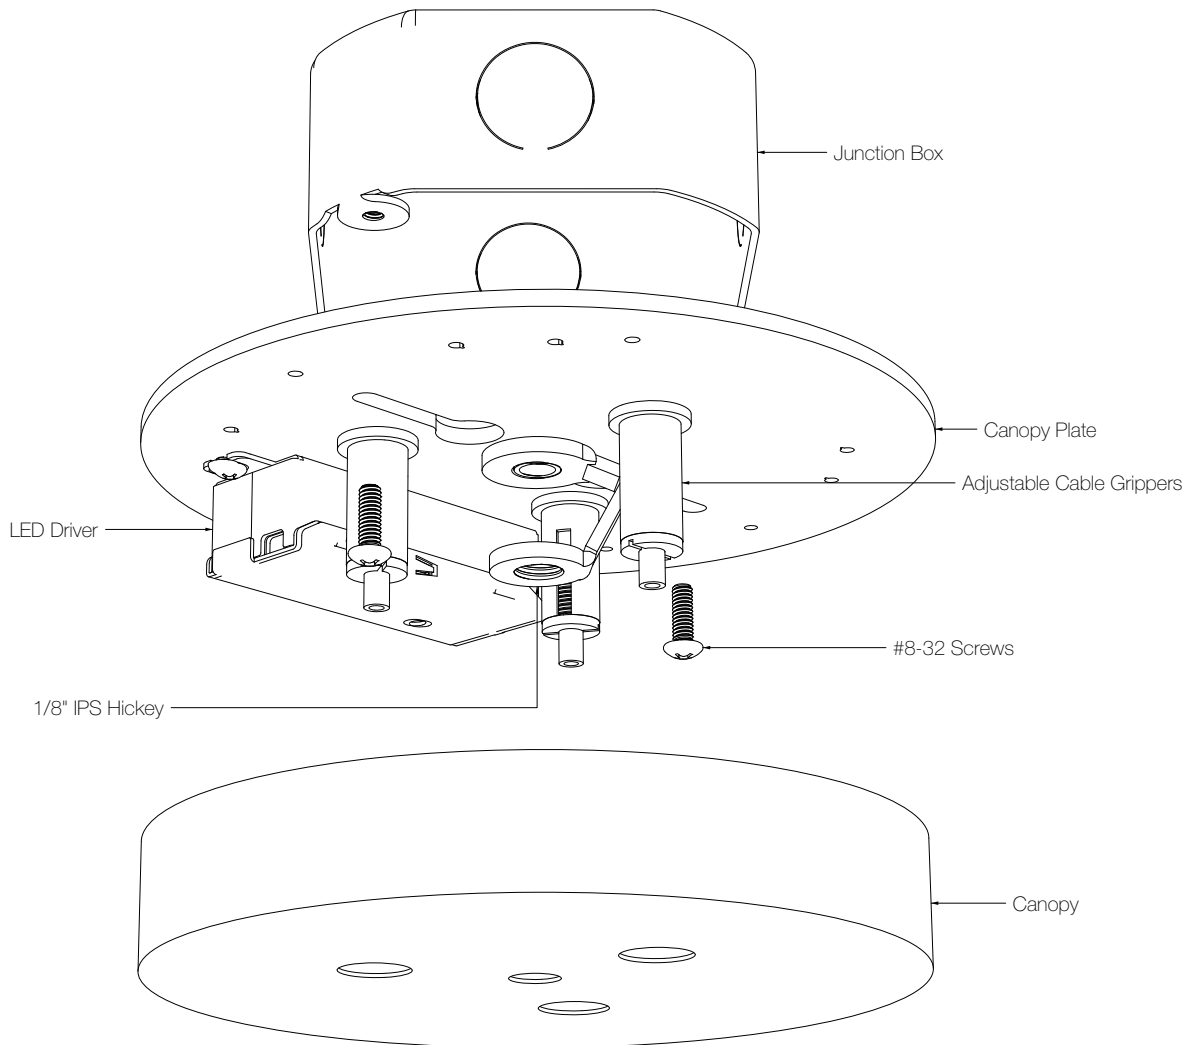

Wire Chart / Tableau des Fils

White/Blanc	N
Black/Noir	L
Green/Vert	PG
Purple/Violet	Dim +
Pink/Rose	Dim -
(or Grey/Gris)	
0-10V Dimming	




Step-by-Step Instruction Guide

Install the light fixture by following the instructions

1

Wiring

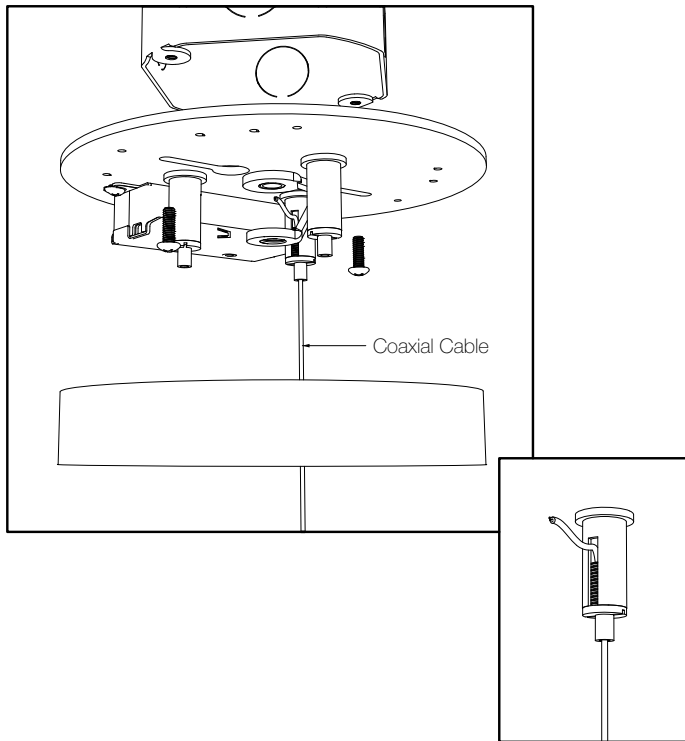

- Secure the Canopy Plate to the Junction box using #8-32 screws
- Run the coaxial cable from the fixture through the canopy, adjustable gripper, and into the canopy box

*Be sure to adjust fixture to desired height and level accordingly

- Have a certified electrician connect the low-voltage coaxial cable to the corresponding cable connector within the canopy
- Repeat with remaining suspension cables


Low Voltage Cables

Red / +
White Inner Cable (Coaxial)

Blue / -
Aluminum Shielding (Coaxial)

2

Assembly

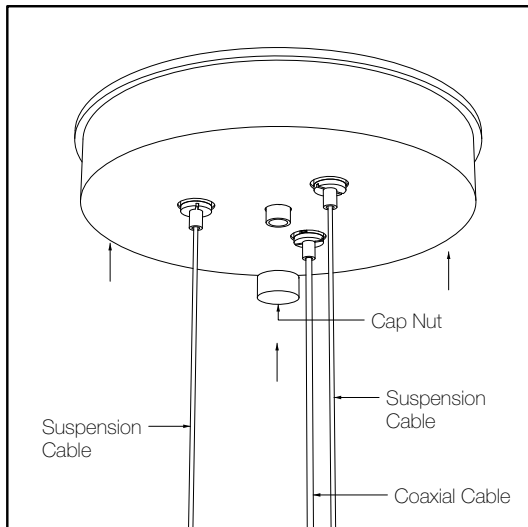

- Raise and hold up the canopy after coaxial cable/suspension cables are secured and the fixture is level
- Secure the canopy in place with the cap nut