


REMOTE | POWER OVER CABLE

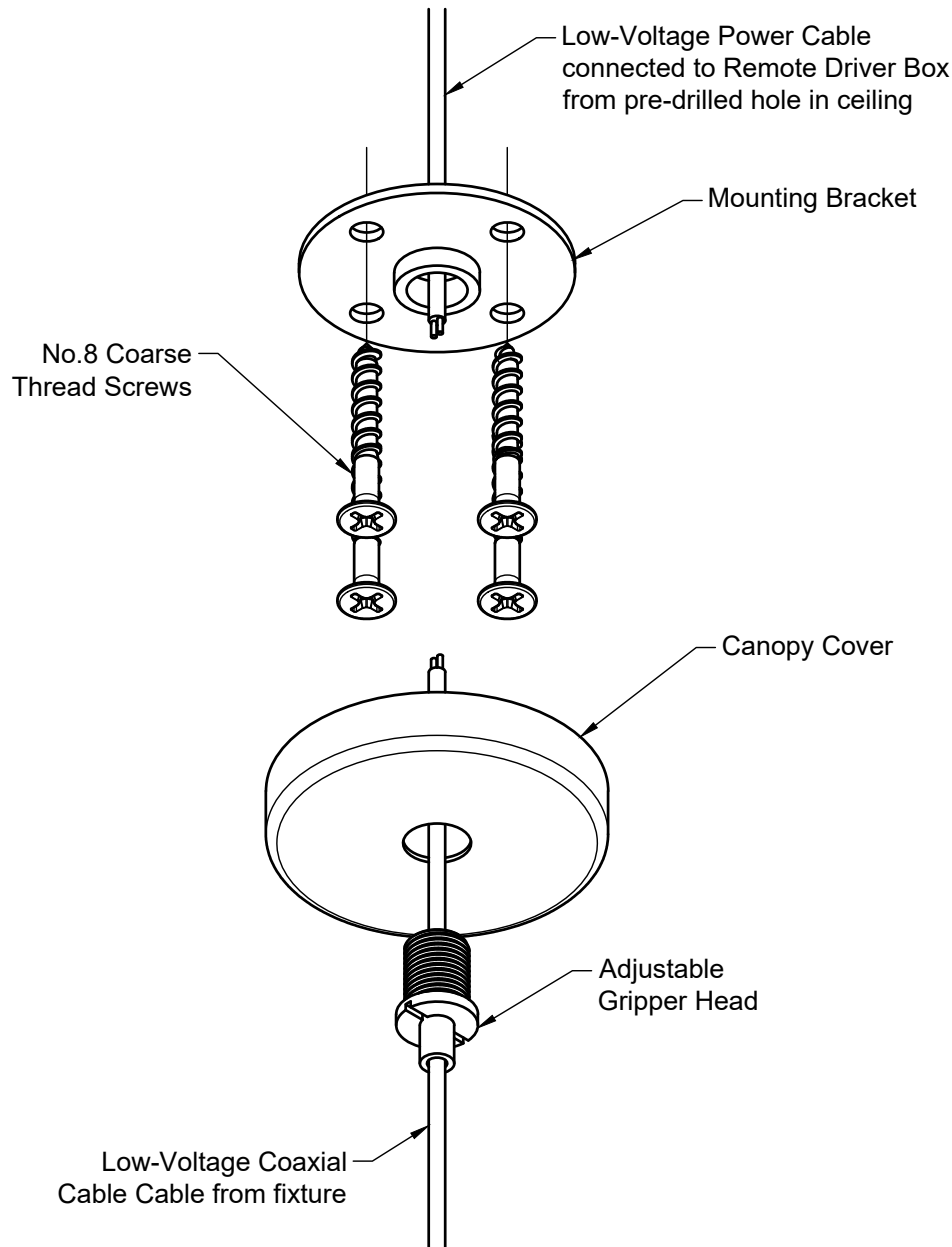

Wire Chart / Tableau des Fils	
White/Blanc	N
Black/Noir	L
Green/Vert	PG
0-10V Dimming	
Purple/Violet	Dim +
Pink/Rose or Grey/Gris	Dim -

Low Voltage Cables	
Red / White Inner Cable (Coaxial)	+
Blue / Aluminum Shielding (Coaxial)	-

1. Have a certified electrician install the Remote Driver Box in a remote location following the wire charts above.
2. Run the cable low-voltage LED cable from the Remote Driver Box location through a pre-drilled hole in the ceiling.
3. Screw the Mounting Bracket over the power feed hole into a structural component in the ceiling.
4. Run the fixture cable through the Adjustable Gripper Head and Canopy Cover.
 - Match uplight or downlight cable with correct labelled spot in Remote Driver Box if applicable.
 - Please note the fixture low voltage cable's polarity and uplight/downlight is indicated on a sticker at the end of the cable.
5. Push up the Canopy Cover and screw the Adjustable Gripper Head into the Mounting Bracket until secure.
6. Screw all additional Non-Adjustable Grippers into a structural component in the ceiling if applicable.
7. Level accordingly.