

# Linear Eco

## SPECIFICATIONS

**SERIES**    **MODEL**  
LW-EB    ECO

### LUMEN OUTPUT

900 lm/ft | 104.9 lm/W  
*Custom lumen output available upon request*

### POWER INPUT

110-277V AC | 50/60 Hz

### CONSUMPTION

8.6 W/ft

### WEIGHT

<1 kg per foot

### DIFFUSER

Polycarbonate tube diffuser

### SUSPENSION

Standard: Adjustable up to specified length

## PRODUCT INFO

### MANUFACTURED IN

Toronto, ON, Canada

### WARRANTY

5 years  
Reclamation program available

### CERTIFICATIONS

Rated for dry or damp locations



### DRIVER COMPATIBILITY ⓘ

*Product specifications and material selections  
will be confirmed at shop drawing stage.*

## LW-EB-ECO



The Linear Eco is a cost-effective solution for projects of any scale. All of its components have been meticulously selected to be California Proposition 65 free within a slim profile and a subtle pop of colour with 100% natural acoustic felt end caps.

# Linear Eco

LIGHT TYPE

QUANTITY

LW-EB-ECO-

-DN-

-1-

Colour Temp.

Wood

Finish

End Cap Felt Finish

Canopy Colour

Cable Colour

Cable Length

Mounting

PARAMETER	SPEC	CODE	DESCRIPTION	CONDITIONALS
01. SERIES		LW-EB	Linear Embedded	
02. MODEL		ECO	ECO	
03. LENGTH (L)			Total length in Feet   Min. 1' - Max. 6' Increments of 1'   8,6 W/ft Final length confirmed in Shop Drawings	
04. LIGHT DISTRIBUTION		DN	Direct	
05. DRIVER		R C	Remote Powered Canopy	
06. CIRCUIT		1	1 Circuit	
07. DIMMING		010 020 DAL + LUT +	0-10V TRIAC/ELV DALI LUTRON EcoSystem	For <b>R</b> drivers only
08. COLOUR TEMP		27 30 35 40	2700K, 90 CRI 3000K, 90 CRI 3500K, 90 CRI 4000K, 90 CRI	
09. WOOD		WAL OAK MPL ASH SSA	Walnut White Oak Hard Maple White Ash Smooth Satin	
10. CLEAR FINISH		CFST CFDO + CFEC	Satin Danish Oil ECO   Zero VOC	Parameter unavailable for <b>SSA</b>
PAINTED FINISH OPTIONAL		PFBK PFWH PFXX	Satin Black Satin White Custom	Parameter for <b>ASH</b> and <b>SSA</b> only
11. END CAP FELT FINISH		F384 F382 F311 F251 F152 F000	Charcoal Pebble Grey Wool White Meadow Green Olive Custom	

+ Product upgrade

# Linear Eco

LIGHT TYPE

QUANTITY

LW-EB-ECO-

-DN-

-1-

-

-

-

-

-

-

-

-C-

-


Series Model L Light Distribution Driver Circuit Dimming Colour Temp. Wood Finish End Cap Felt Finish Canopy Colour Cable Colour Cable Length Mounting

PARAMETER	SPEC	CODE	DESCRIPTION	CONDITIONALS
12. CANOPY COLOUR		WH BK XX +	White Black Custom	
13. CABLE COLOUR		C	Clear Jacket with Silver Core	
14. CABLE LENGTH			In Feet   5' Standard   On-site adjustable	
15. MOUNTING		PO TB JB	Power Over Cable T-Bar Support   For 15/16" T-Bar Width Junction Box Support	For <b>R</b> drivers only For <b>R</b> drivers only For <b>C</b> drivers only



## CUSTOM NOTES

+ Product upgrade


LIGHTING DIMENSIONS




DRIVER ⓘ




COLOUR TEMPERATURE ⓘ

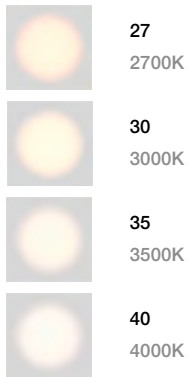


WOOD | FSC CERTIFIED ⓘ

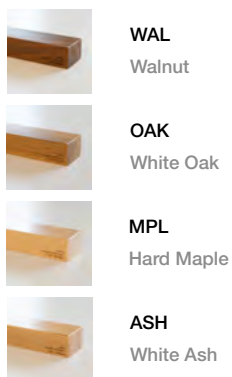


PAINTED WOOD | TEXTURE ⓘ





END CAP FELT FINISH ⓘ

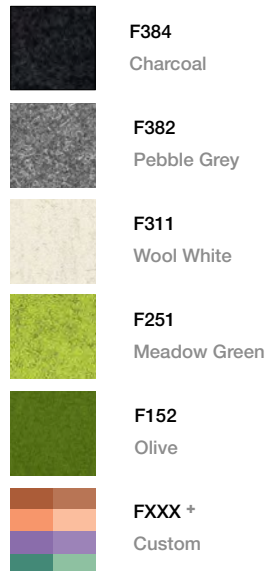


PAINTED FINISH (OPTIONAL) ⓘ




MOUNTING REMOTE ⓘ




MOUNTING POWERED CANOPY ⓘ



REMOTE CANOPY



POWERED CANOPY

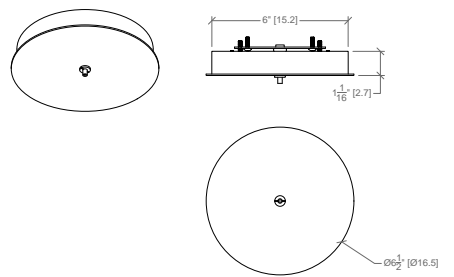

+ Product upgrade