

Installation Guide

OG Architects + aaline: OG Brick


Applicable to Models: OG-BR

Step-by-Step Instruction Guide

Install the light fixture by following the instructions

1


Pre-Install

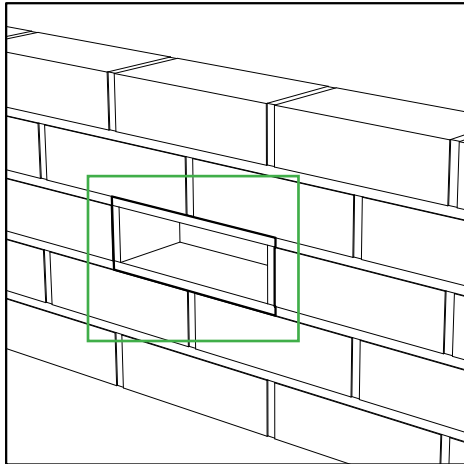

- Build a wooden block to serve as a placeholder for where the Brick Light will be placed, to be removed after installation
- Reach out to aalinea for a plywood niche if required

2

Wiring

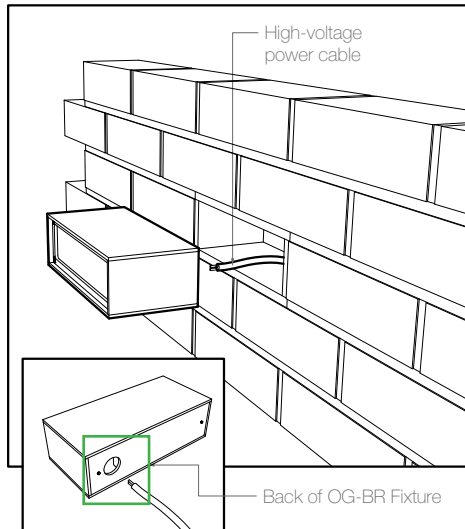


- Bring the high-voltage power cable from the wall into the knock out in the back of the fixture
- Use appropriate strain relief to secure the cable safely

Wire Chart / Tableau des Fils

White/Blanc	N
Black/Noir	L
Green/Vert	PG
Purple/Violet	Dim +
Pink/Rose	Dim -
(or Grey/Gris)	
0-10V Dimming	

3


Wiring Cont.

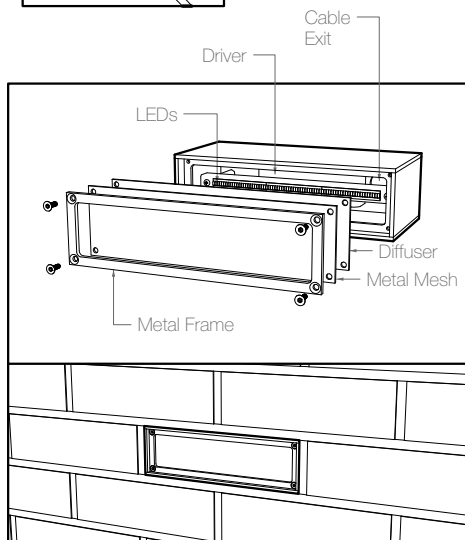

- Remove the Metal Frame, Metal Mesh, and Diffuser from the front of the fixture to access the fixture Driver
- Have a certified electrician connect the high-voltage power cable from the wall to the driver within the fixture using the Wire Chart above

4

Mounting

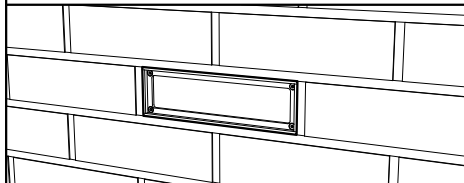


- Replace the Metal Frame, Metal Mesh, and Diffuser
- Use shims to adjust the Brick Light in the correct position and use chaulking around the fixture to seal between the surrounding brick and the Brick Light

Step-by-Step Instruction Guide

Install the light fixture by following the instructions

1


Pre-Install

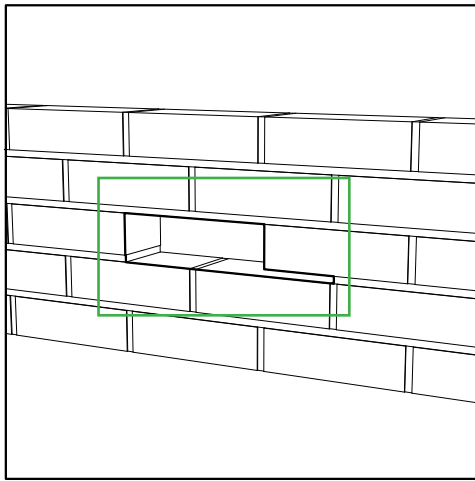

- Remove a brick from the wall and additional mortar if required to access the low-voltage power cable from the wall
- We recommend that the power supply be within 50 feet of the Brick Light fixture

2

Wiring

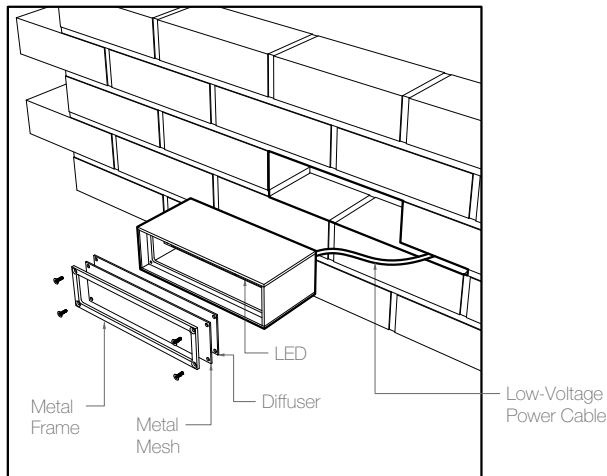

- Remove the Metal Frame, Metal Mesh, and Diffuser from the front of the fixture to access the fixture LEDs
- Have a certified electrician connect the low-voltage power cable from the wall to the LEDs within the fixture using the Wire Chart below

Low Voltage Cables

Red /

White Inner Cable (Coaxial)




Blue /

Aluminum Shielding (Coaxial)



3

Mounting

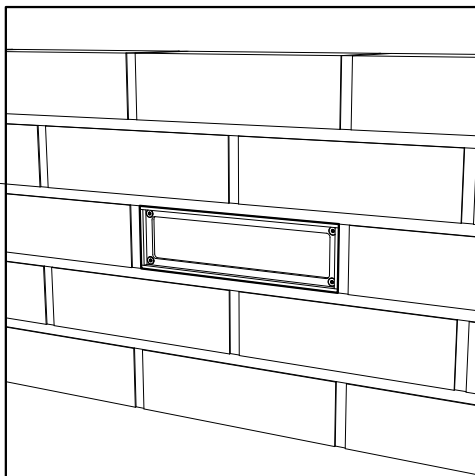

- Use shims to adjust the Brick Light in the correct position and use chaulking around the fixture to seal between the surrounding brick and the Brick Light