Installation Guide

Echo Pendant


Applicable to Models: EC-PN

**Note: To be installed by a certified electrician based on the codes of the region of installation. Fishtnk Inc. recommends two separate junction boxes for low voltage and high voltage wires. To comply with electrical code. A licensed electrician can install as appropriate **Remarque: À être installé par utn électricien certifié, conformément aux codes régionaux d'installation électriques. Fishtnk recommende deux boîtes séparées pour les câbles à basse tension et à haute tension



Overall

Install the light fixture by following the instructions (For step-by-step guide see page 3)

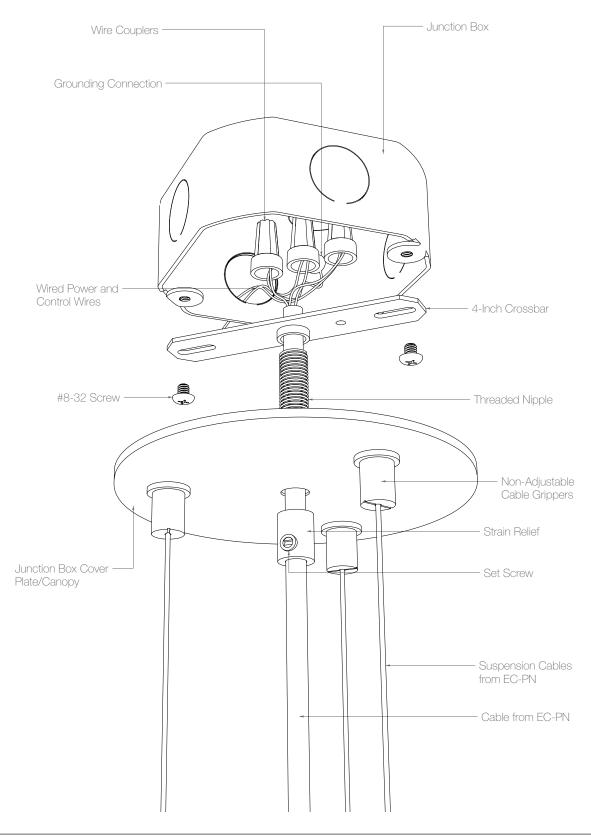




Step-by-Step Instruction Guide

Install the light fixture by following the instructions

1


Junction Box Assembly



- Fasten the 4-inch crossbar to the junction box using #8-32 screws
- In order, run the fixture cable through the strain relief, junction box cover plate/canopy, threaded nipple, and 4-inch crossbar

2

Wiring




- Have a certified electrician connect the power and control wires using appropriate wire-couplers according to the wire chart below
- Tighten the threaded nipple into the 4-inch crossbar afterwards

Wire Chart / Tableau des Fils

White/Blanc	M
Black/Noir	L
Green/Vert	PG
Purple/Violet	Dim +
Pink/Rose	Dim -
(or Grey/Gris)	
0-10V Dimming	<u> </u>

3

Junction Cover Plate Installation



- Push up the junction cover plate through the threaded nipple
- Tighten the strain relief to the threaded nipple
- Tighten the set screw on the strain relief to secure the fixture cable
- Use the adjustable cable grippers on the fixture to level the fixture evenly

